

# ELKAY® SPECIFICATIONS

## Lustertone® Single Bowl Sink with Quick-Clip® Model LRQ Series

### GENERAL

Highest quality sink seamlessly drawn of #18 gauge, type 304 (18-8) nickel bearing stainless steel. Self-rimming.

### DESIGN FEATURES

LRQ Bowl Depth: 8" (LRQ2521), 7-1/2" (LRQ1919), 7-5/8" (all others).

Coved Corners: 1-3/4" vertical and horizontal radius.

Bowl and Faucet Deck Recess: 3/16" below outside edge of sink.

Finish: Exposed surfaces are hand blended to a lustrous high-lighted satin finish.

Underside: Fully undercoated to dampen sound and prevent condensation. LRQ2521 is fully protected by heavy duty Sound Guard® undercoating.

### OTHER




Drain Opening: 3-1/2".

NOTE: Unless otherwise specified, models with one, two, three or OS4 faucet hole option are furnished with 3 faucet holes as shown; models with choice of one, two, three, four or five faucet hole option are furnished with 4 faucet holes standard.

### SINK DIMENSIONS (INCHES)\*


Model Number	Overall		Inside Bowl			Cutout in Countertop (1 1/2" Radius Corners)		No. of 1 1/2" Dia. Faucet Holes 4" Center	Minimum Cabinet Size	Ship. Wt. Lbs.
	L	W	L	W	D	L	W			
	A	B	C	D	E	L	W			
LRQ1517	15	17 1/2	12	12	7 5/8	14 3/8	16 7/8	1, 2, MR2 or 3	18	10
LRQ1522	15	22	11 1/2	16	7 5/8	14 3/8	21 3/8	1, 2, MR2 or 3	18	12
LRQ1716	17	16	14	10	7 5/8	16 3/8	15 3/8	1, 2, MR2, 3 or OS4	21	12
LRQ1720	17	20	14	14	7 5/8	16 3/8	19 3/8	1, 2, MR2, 3 or OS4	21	12
LRQ1722	17	22	13 1/2	16	7 5/8	16 3/8	21 3/8	1, 2, MR2, 3 or OS4	21	13
LRQ1918	19	18	16	11 1/2	7 5/8	18 3/8	17 3/8	1, 2, MR2, 3 or OS4	24	13
LRQ1919	19 1/2	19	16	13 1/2	7 1/2	18 7/8	18 3/8	1, 2, MR2, 3 or OS4	24	13
LRQ2022	19 1/2	22	16	16	7 5/8	18 7/8	21 3/8	1, 2, MR2, 3 or OS4	24	14 1/2
LRQ2219	22	19 1/2	18	14	7 5/8	21 3/8	18 7/8	1, 2, MR2, 3, 4 or 5	27	13
LRQ2222	22	22	19	16	7 5/8	21 3/8	21 3/8	1, 2, MR2, 3, 4 or 5	27	13
LRQ2521	25	21 1/4	21	15 3/4	8	24 3/8	20 5/8	1, 2, MR2, 3, 4 or 5	30	15
LRQ3122	31	22	28	16	7 5/8	30 3/8	21 3/8	1, 2, MR2, 3, 4 or 5	36	19
LRSQ3322	33	22	28	16	7 5/8	32 3/8	21 3/8	1, 2, MR2, 3, 4 or 5	36	19 1/2

\*Length is left to right. Width is front to back.

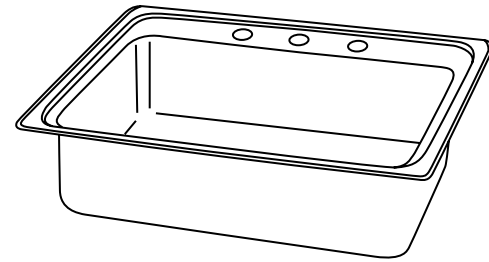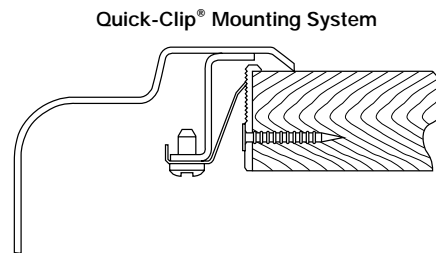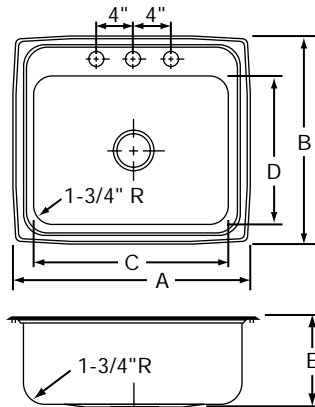

Model LRQ22193

### HOLE DRILLING CONFIGURATIONS

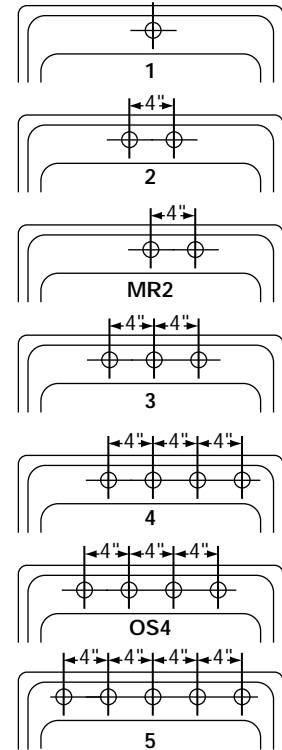

ALL DIMENSIONS IN INCHES, TO CONVERT TO MILLIMETERS MULTIPLY BY 25.4.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.