
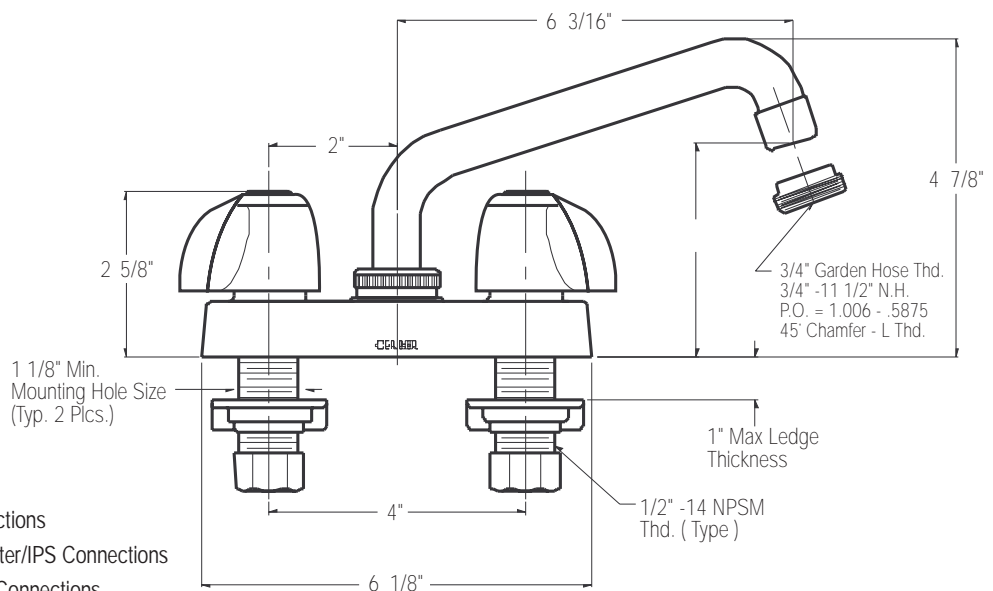


**Features:**

- Cast brass underbody, heavy chrome plated brass shell
- Metal handles with acrylic hot and cold index buttons
- Compression stems with renewable brass seats
- Working parts can be easily replaced
- 6" or 8" swing spout
- 4" centers for mounting
- 2.2gpm (8.3 L/min) @ 60 psi maximum aerator
- 1/2" NPSM supply connections with brass coupling nuts
- ADA compliant handles operate with less than 5 lbs. force

**Technical Specifications:**

- ASME A112.18.1M
- CABO/ANSI A117.1 (ADA)
- CSA B125
- ANSI/NSF 61-1997b

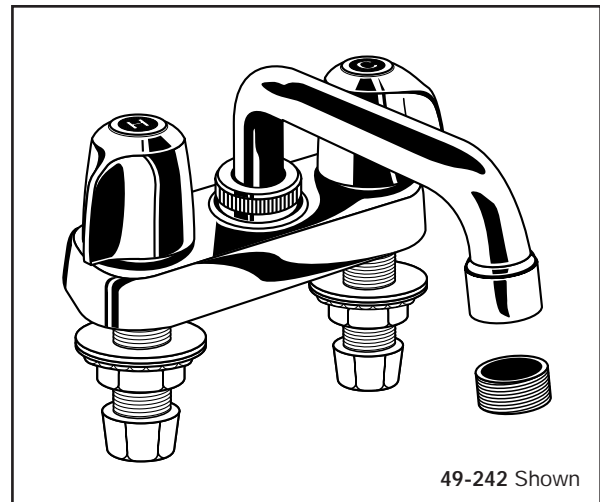

**Catalog Numbers:**

- |                |   |
|----------------|---|
| <b>8" spt.</b> | <b>6" spt.</b>                                |
| • 49-231       | • 49-241 Aerator/IPS Connections              |
| -              | • 49-242 Aerator/Hose Adapter/IPS Connections |
| • 49-234       | • 49-244 Hose Adapter/IPS Connections         |

**Prefixes Available:**

- 8- Crystalite™ handles
- 80- Washerless cartridge
- 88- Washerless cartridge & Crystalite™ handles
- C0- Ceramic cartridge
- C8- Ceramic cartridge & Crystalite™ handles
- X- Less handles
- XX- Washerless cartridge less handles

For ceramic cartridges, less handles, see 59-980 series

**Suffixes Available**

- 47 Brass mounting nuts
- 49 Zinc die cast mounting nuts
- 66 Surgical wrist handles
- 67 Vandal proof aerator- 0.5 gpm (1.9 L/min)
- 68 Vandal proof aerator- 2.2 gpm (8.3 L/min)
- 95 Monel seats (compression only)
- 96 Celcon seats (compression only)

