


# Guy Gray Manufacturing Co., Inc.

Blandville Road P. O. Box 2287 Paducah, KY 42002-2287 Phone (502) 554-4423

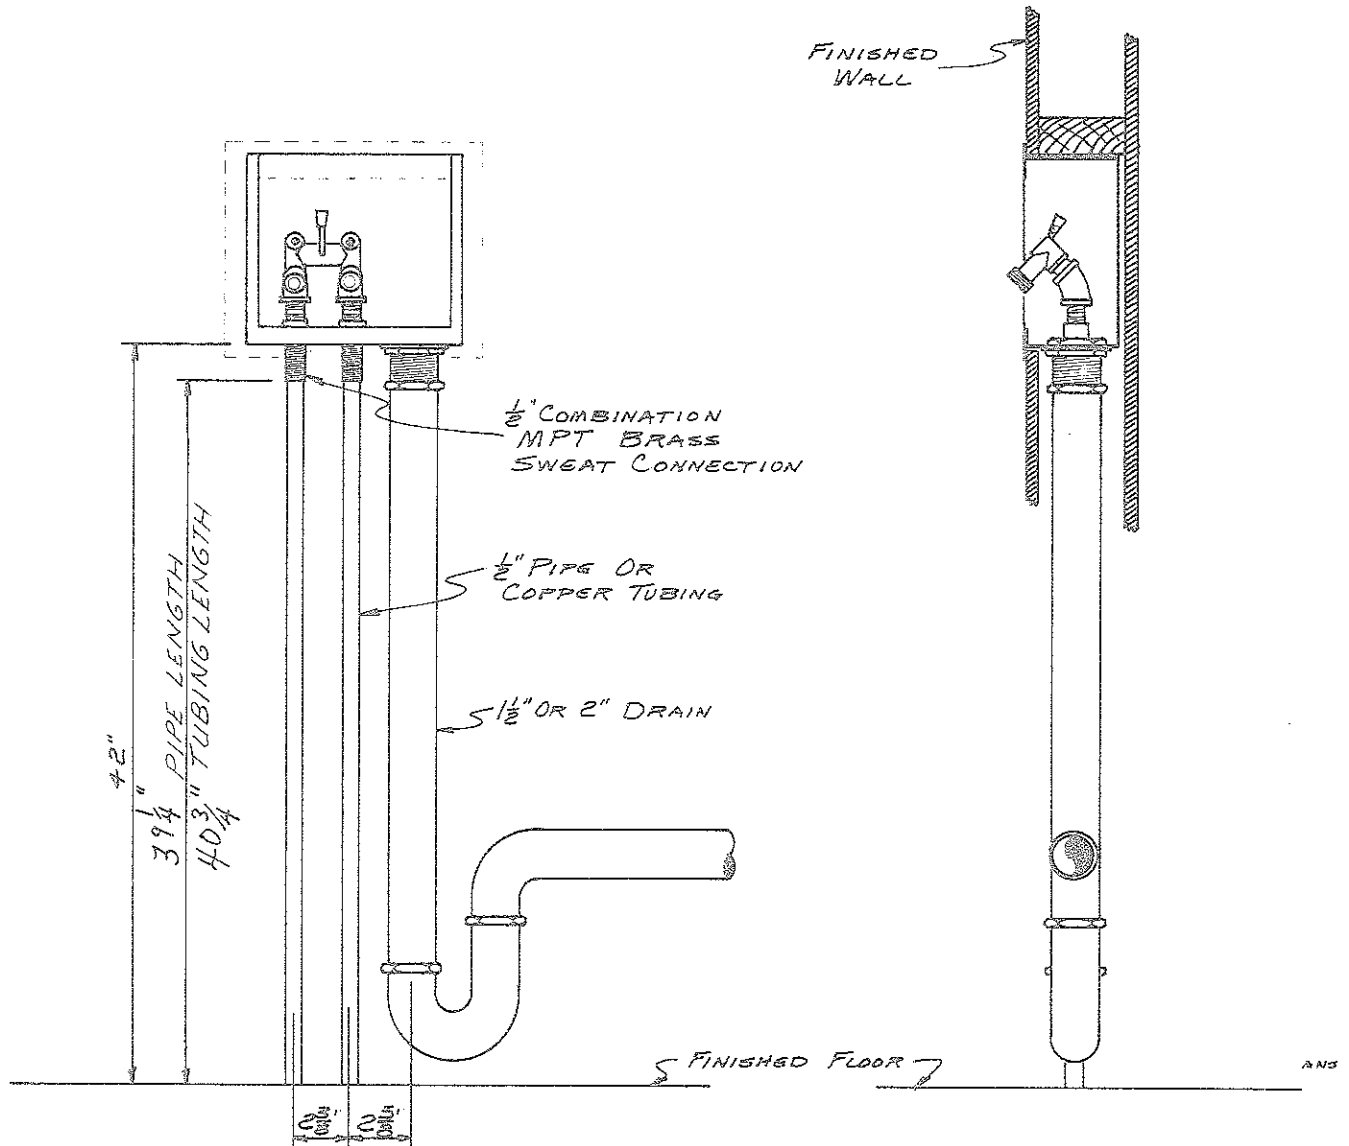

## PLUMBING ROUGHING-IN MEASUREMENTS FOR SPACE SAVER WASHING MACHINE SUPPLY AND DRAIN MODEL WB-150 & WB 200

### INSTALLATION INSTRUCTIONS

- 1 Remove front plate from fixture
- 2 Fasten fixture to stud or header with screws in holes provided
- 3 Install half-inch male end of connectors through half-inch holes in bottom of fixture and secure with rubber washers, crow foot and half-inch lock nuts.
- 4 Install half-inch nipple in female end of connector inside of fixture using pipe joint compound--install half-inch forty-five degree ell to nipple
- 5 Install half-inch male Duo-Cloz valve in forty-five degree ell
- 6 For copper installation sweat copper tube to bottom of connector
- 7 For galvanized pipe installation use half-inch coupling or unions
- 8 To connect drain line use flanged lock nut with rubber washer with slip nut installed inside fixture
- 9 Drill weep hole in slip nut so any water spills in box will run into drain.
- 10 After wall is finished replace front plate with screws provided with fixture