
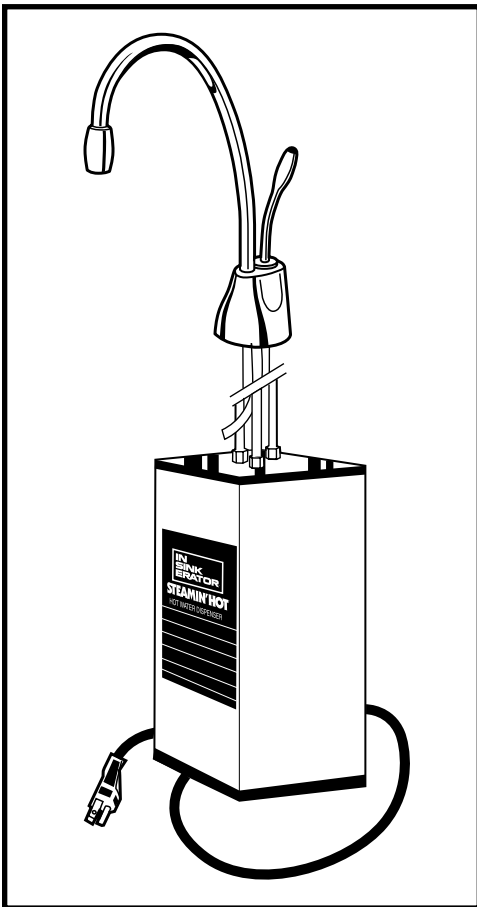


IN SINK ERATOR®


model GN1100

Instant Hot Water Dispenser

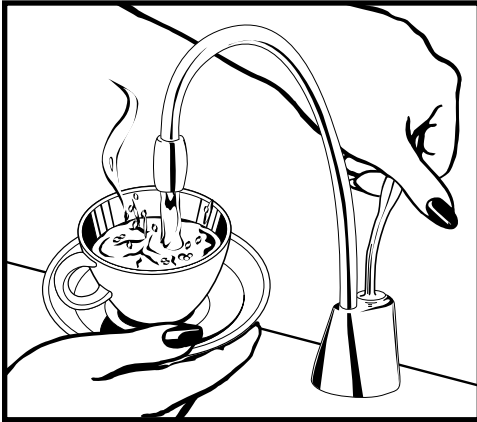

Submittal Sheet

- Beautifully arched gooseneck spout provides clearance for large pots
- Easy-action lever with automatic self closing valve.
- Convenient swivel spout
- Solid brass construction.
- Available in three designer finishes: Brilliant Chrome, Satin Nickel & Crisp White.
- One (1) year unconditional in-home warranty covering parts & labor*
- Manually resettable thermal overload protector.

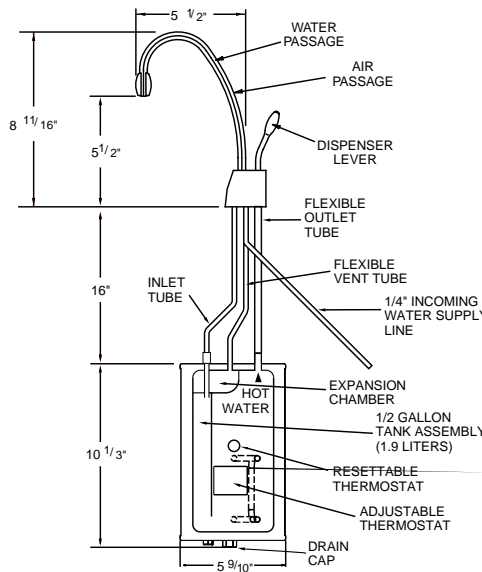

- Minimum mounting hole diameter 1-3/8"
- Maximum distance between tank and dispenser head 16"

Sample Specification

- Capacity - 60 cups of 190° F water per hour
- Electrical - 115 volts A.C., 750 watts, 6.5 amp heating element with grounded three (3) prong plug
- Thermostat - Snap action, adjustable from 140° to 200° F (factory pre-set at approximately 190° F)
- Insulation - Meets U.L. 94HF-1 Flammability Rating
- Valve - Instantaneous self-closing
- Shipping Weight - Approximately 10 lbs.

* The complete In-Sink-Erator warranty is included in the Installation Care & Use Booklet, packed with each unit.

Specifications

Capacity	60 cups of 190°F. water per hour
Electrical	115 volts A.C, 750 watts, 6.5 amp heating element with grounded three (3) prong plug.
Thermostat	Snap-action, adjustable from 140 F. to 200 F. (factory pre-set at 190°F.)
Insulation	Meets U.L. 94HF-1 flammability specification
Valve	Instant, self-closing.
Shipping Weight	Approximately 10 lbs.

Job Specifications



IN SINK ERATOR®