
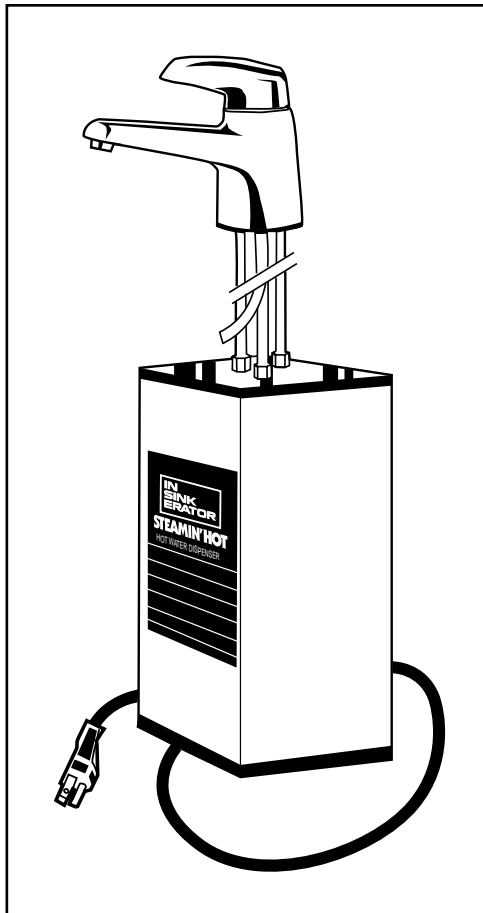


IN SINK ERATOR®

model H-990

Hot Water Dispenser

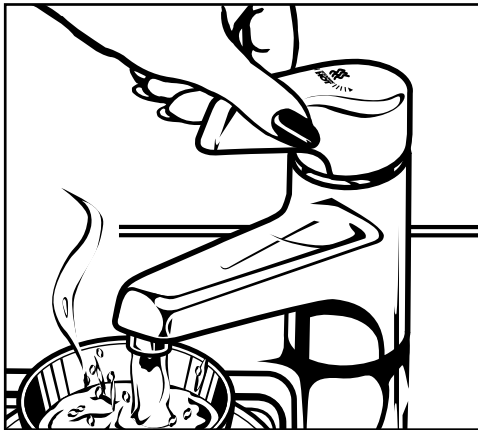


Submittal Sheet

- 1-year full warranty on parts and labor.
- System provides up to 60 cups of 190°F water per hour.
- Faucet completely insulated from 190°F water.
- Die-molded, high efficiency, expanded polystyrene thermal barrier surrounds tank for low heat loss.
- Adjustable thermostat, convenient drain, thermally fused to prevent tank damage from dry start-up or loss of water.
- Tank is always open to atmospheric pressure and requires no relief valves.
- Available in Chrome, gloss White, and gloss Sand.
- Contemporary European styled faucet.

Specifications

Capacity	60 cups of 190°F water per hour
Electrical	750 watts, 6.5 amps, 115 volts A.C. U.L. listed - 3-wire cord and 3-prong plug provided.
Thermostat	Snap-action, adjustable from 140°F. to 200°F. (factory pre-set at 190°F.)
Insulation	Meets U.L. 94HF-1 flammability specification
Valve	Instant, self-closing.
Shipping Weight	9 lbs.

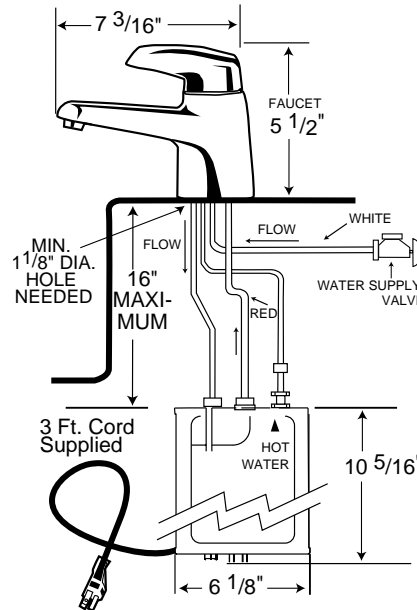

Sample Specification

Hot Water Dispenser(s) shall be In-Sink-Erator model H-990. 60 cups/hour insulated tank with drain screw, chrome-finish faucet, instant self-closing valve, adjustable thermostat, 1-year full warranty on parts and labor.*

* The complete In-Sink-Erator warranty is included in the Care & Use Booklet, packed with each unit.

Job Specifications



IN SINK ERATOR®