

WALL-MOUNT LAVATORY

K-1721, K-1723, K-1729

ADA


FEATURES

- 20"(50.8cm) x 18-1/4"(46.4cm)
- Vitreous china
- Ledge-back
- 8"(20.3cm) centers (K-1723), 4"(10.2cm) centers (K-1729) or single-hole (K-1721)
- With overflow
- ADA compliant
- With hanger
- Drilled for concealed arm carrier

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ADA
- ASME/ANSI A112.19.2M
- CABO/ANSI A117.1
- IAPMO/UPC
- State of Massachusetts

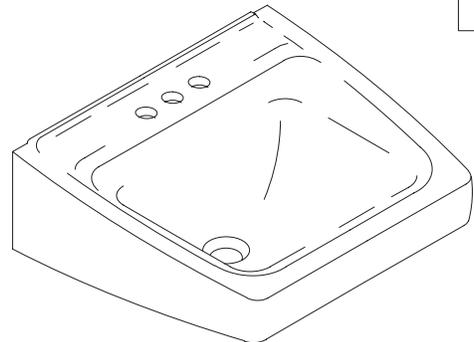

COLORS/FINISHES

- 0 White
- Other Refer to Fixtures Price Book for additional colors

Accessories:

- CP Polished Chrome
- Other Refer to Faucets Price Book for additional finishes

SPECIFIED MODEL:

Model	Description	Colors/Finishes	
K-1723	8" (20.3cm) centers lavatory	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-1729	4" (10.2cm) centers lavatory	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-1721	Single-hole lavatory	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
Recommended Accessories			
K-8998	Trap	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

PRODUCT SPECIFICATION:

The lavatory shall be 20"(50.8cm) in length, and 18-1/4"(46.4cm) in width. Lavatory shall be made of vitreous china. Lavatory shall be ledge-back with hanger. Lavatory shall have 8" (20.3cm) centers (K-1723), 4" (10.2cm) centers (K-1729), or single-hole (K-1721) drilling. Lavatory shall be drilled for concealed arm carrier. Lavatory shall have overflow. Lavatory shall be ADA compliant. Lavatory shall be Kohler Model K-_____-_____-_____.

PRODUCT INFORMATION

ADA compliant.			
Fixture*:		basin area	water depth
Lavatory		14" (35.6cm) x 12" (30.5cm)	4-7/8" (12.4cm)
Drain hole	1-3/4" D. (4.4cm)		
* Approximate measurements for comparison only.			
Holes	K-1723	K-1729	K-1721
Spout	1-3/8" D. (3.5cm)	1-1/4" D. (3.2cm)	1-3/8" D. (3.5cm)
Faucet	1-3/8" D. (3.5cm)	1-1/4" D. (3.2cm)	
Soap dispenser			1-1/4" D. (3.2cm)
Included Components:			
Hanger			64839




INSTALLATION NOTES

Install this product according to the installation guide.

Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2M.

Concealed arm carrier required, **NOT** supplied by Kohler Co. Supplied hanger not used with concealed arm carrier.

CONCEALED ARM HOLE LOCATIONS K-1723

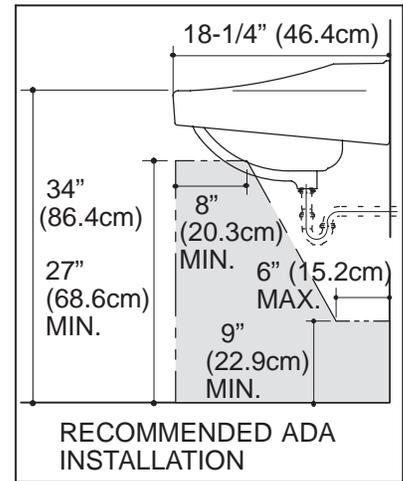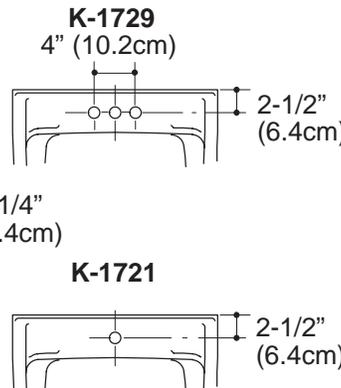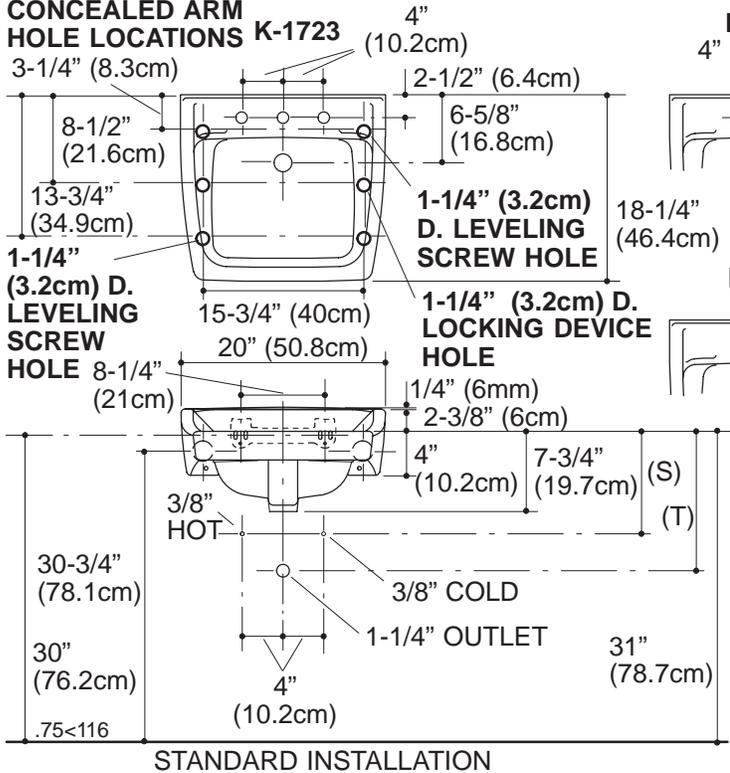

ADA rim height = A	ADA arm carrier height = B
34" (86.4cm) Max.	33" (81.9cm) Max.
(T) Pop-up drain 13-3/8" (34cm), grid drain 12-1/2" (31.8cm).	
(S) 10" (25.4cm) (Based on 12" (30.5cm) riser which may require cutting).	

PRODUCT DIAGRAM