

Radii™ Bi-Level Modular

M8CR

Suggested Specification

Shall deliver 8.0 gph of 50° F water at 90° ambient and 80° F inlet water. Model M8CR shall include push pads to activate the flow of water. Fountains shall be designed to eliminate splashing and standing water. Bubbler shall have flexible guard and operate between 20 and 120 psi. Chiller unit shall use R-134a refrigerant. Shall be listed by Underwriters Laboratories, certified to the Air Conditioning and Refrigeration Institute Standard 1010 and certified by Canadian Standards Association. Shall comply with ANSI A117.1 and ADA. Shall comply with the Safe Drinking Water Act and Lead Contamination Control Act. Shall comply with ANSI/NSF 61.

RADII[™] Modular Bi-Level Water Cooler meets the needs of the physically challenged and the able bodied.

Model

M8CR A light press of the push pad activates the water flow.

Standard Features

- Built in 100 micron strainer stops particles before they enter the waterway
- Flexible bubbler guard
- Lead free materials and waterways
- Brushed stainless steel finish
- Refrigerant R-134a
- Heavy duty galvanized steel mounting frame
- High efficiency cooling system
- Limited five year warranty

Finishes

- Standard Finish: Stainless Steel
- Optional Finish (at additional cost) Regency Bronze

Options (at additional cost)

Stainless Steel Bubbler

Installation

- Prior to roughing-in, consult local, state and federal codes for proper mounting height
- Wall mounting frame is furnished for easy installation





ADA Compliant (when installed in an alcove or with right and left wing walls.)



Components in these water coolers are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Limited 5-Year Warranty (Continental limits of the United States and Canada only): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty: One year on the sealed refrigeration system and most component parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each water cooler; sample copy available upon request.

Models covered by these specifications comply with all known Plumbing Codes. Listed by Underwriters' Laboratories. Certified by Canadian Standards Association, and Certified to Air Conditioning and Refrigeration Institute Standard 1010.










Model	50° F Drinking Water 90° F Ambient Air Temp				115 Volts, 60 HZ					
	Rated Capacity GPH		Pre-Cooler	Hot'N Cold™ Model	Compr. HP	Full Load Amps	Rated Watts	Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx.
M8CR	8.0	8.0	No	No	1/5	4.6	340	No	Yes	135 Lbs.

OASIS® RADII™ FOUNTAIN MODEL M8CR

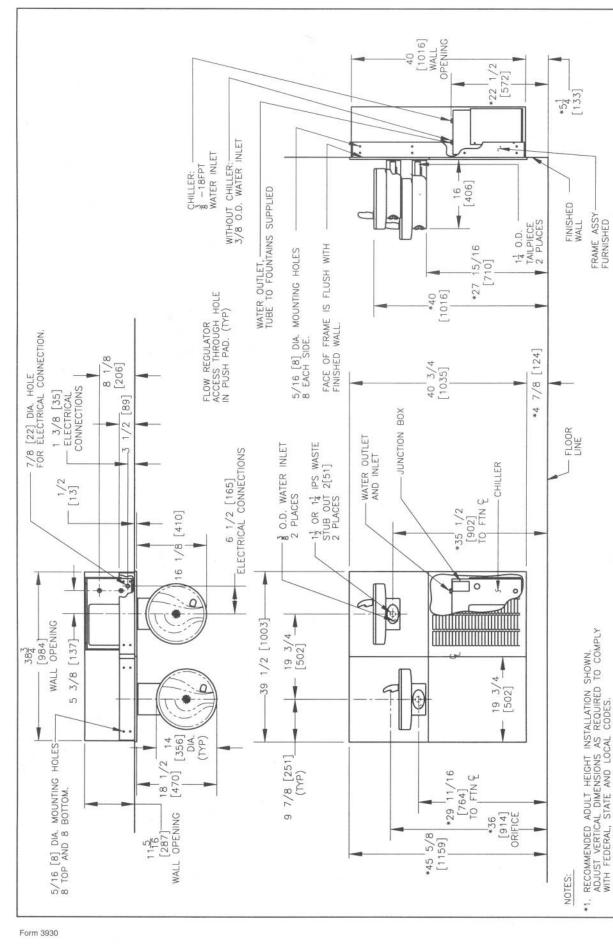

OASIS Corporation 265 N. Hamilton Rd., Columbus, OH 43213 www.oasiswatercoolers.com

STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE NOT PROVIDED.

5 m

ALL DIMENSIONS ARE IN INCHES.

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.



© 2002 OASIS Corporation.

OASIS are registered trademarks of OASIS Corporation. RADII™ and Hot 'N Cold™ are trademarks of OASIS Corporation.

AND DIMENSIONAL DRAWING ROUGHING-IN

THIRD ANGLE PROJECTION

0