

Models

- M8SCEE produces a light beam that is reflected off the user to automatically start water flowing. If user does not move away within 30 seconds, water shuts off automatically.
- M8SCPM, when the push-button is depressed, water continues to flow as long as the button is depressed.

When accessory apron is used on the upper unit, this cooler will comply with ADA guidelines when properly installed. Apron not required when installed in an alcove or if a wing wall is installed on the right side.

Standard Features

- Waterways Are Lead-Free In Materials & Construction
- Stainless Steel Surfaces
- Flexible Bubbler Guard
- Heavy-Gauge Galvanized Steel Wall Mounting Frame
- High-Efficiency Cooling Tank and Coil
- Refrigerant R-134a
- Limited 5-Year Warranty

Installation

- Prior to roughing-in, consult with local, state, and federal codes for proper mounting height.
- Refrigerated unit requires 11-5/16" wall recess.
- Shipped with complete instructions and wall mounting frame.

Colors

- Standard Finish: Stainless Steel
- Optional finishes at extra cost: Regency Bronze

Accessories

- Stainless Steel Apron for upper unit (032067-001)
- Regency Bronze Apron for upper unit (032067-002)

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample copy available upon request.

Components in these water coolers/fountains are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.



**WATER COOLERS
& BARRIER-FREE
SPLIT-LEVEL
MODULAR**



These coolers were designed to conveniently serve both the able-bodied and the disabled in one attractive, space-saving installation.

Model M8SCPM Shown



Models covered by these specifications comply with all known Plumbing Codes. Listed by Underwriter's Laboratories. Certified by Canadian Standards Association, and Certified to Air Conditioning and refrigeration Institute Standard 1010.

Export Warranty: One year on the sealed refrigeration system and most component parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each water cooler, sample copy available upon request.

Specifications are subject to change without notice.

Copyright 1999 OASIS Corporation

Oasis® is a registered trademark of OASIS Corporation.



*Air Conditioning and Refrigeration Institute Standard Rating Condition 80°F inlet water temperature.

Model	50°F Drinking Water 90°F Ambient Air Temperature*		Pre-Cooler	Hot 'N Cold Model	115 Volts, 60 Hz			Glass Filler Accessory Option	Cabinet Color Option	Net Weight (Approx.)
	Rated Capacity GPH	Base Rate GPH			Compr. HP	Full Load Amps	Rated Watts			
M8SCEE	8.0	8.0	No	No	1/5	4.5	380	No	Yes	131 Lbs.
M8SCPM	8.0	8.0	No	No	1/5	4.3	380	No	Yes	131 Lbs.

OASIS Corporation


265 North Hamilton Road ♦ PO Box 13150 ♦ Columbus, Ohio 43213-0150 U.S.A.

1.800.646.2747 ♦ www.OasisWaterCoolers.com

Oasis® is a registered trademark of OASIS Corporation
 Specifications are subject to change without notice
 Copyright 1999 OASIS Corporation


OASIS Corporation
 265 North Hamilton Road • PO Box 13150
 Columbus, Ohio 43213-0150 U.S.A.
 1.800.646.2747 • www.OasisWaterCoolers.com

ROUGHING-IN & DIMENSIONAL DRAWING

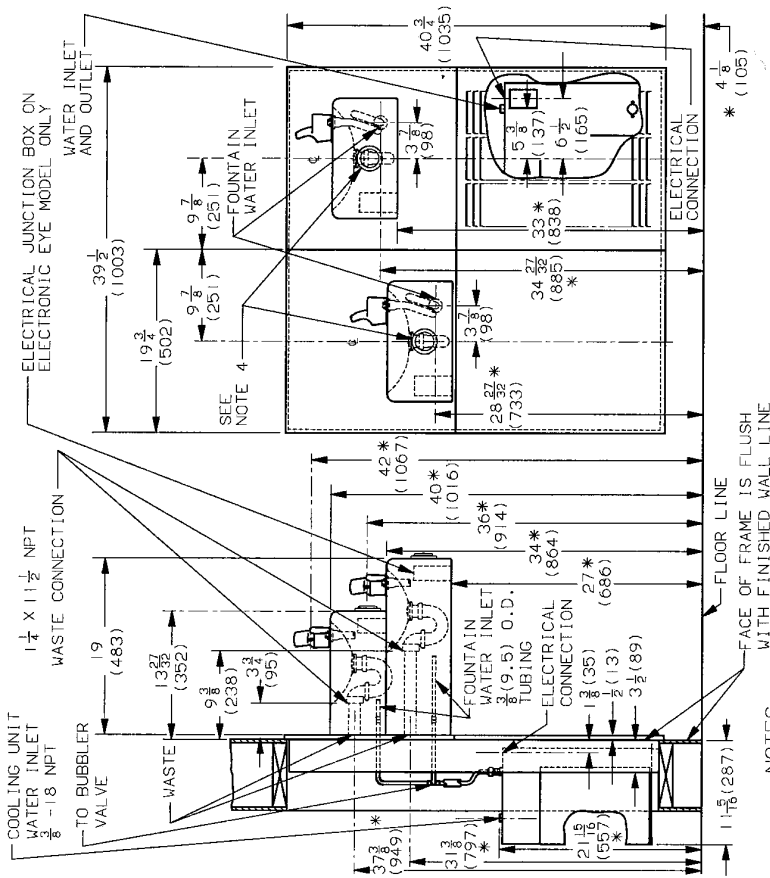

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES.
 2. DIMENSIONS IN PARENTHESISE () ARE IN MILLIMETERS.
 3. STOP VALVE NOT PROVIDED WITH UNIT.
 4. 2" (51) DIA. PUSHBUTTON OR TWO 1 1/8" (14) DIA. ELECTRONIC EYES.
 5. * RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.

WALL OPENING & ASSEMBLY

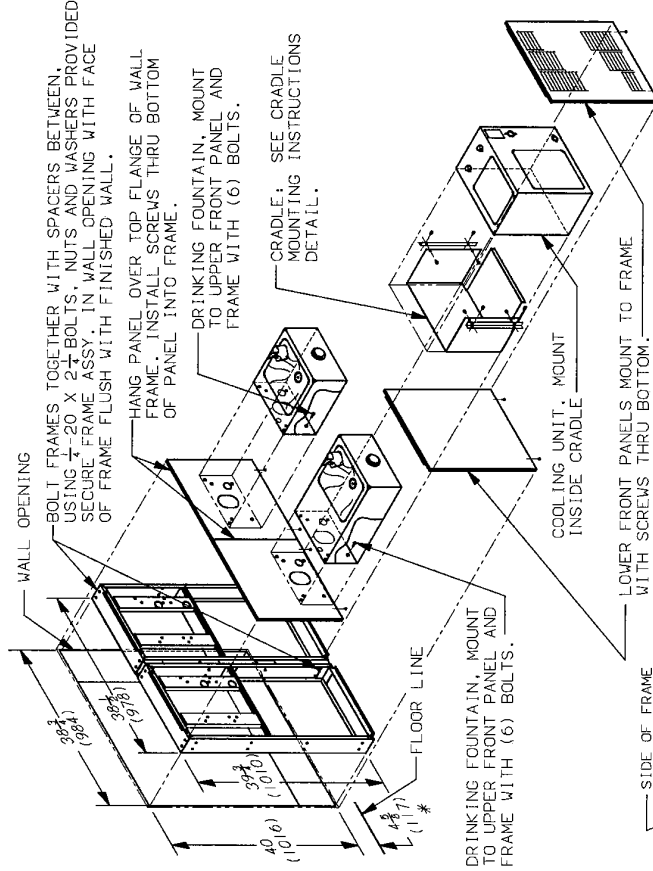

SECURE CRADLE MOUNTING ANGLE TO FRAME FLANGE WITH (4) SCREWS PROVIDED. DO NOT TIGHTEN SCREWS. SLIDE CRADLE BETWEEN ANGLES AND ATTACH TO ANGLES WITH (4) SCREWS PROVIDED. FRONT FLANGE OF CRADLE IS BEHIND FRAME. TIGHTEN ALL SCREWS.

Models M8SCPM & M8SCFE