

COMMANDER®




SC-3001-LD



SC-3002-LD



SC-3004-LD

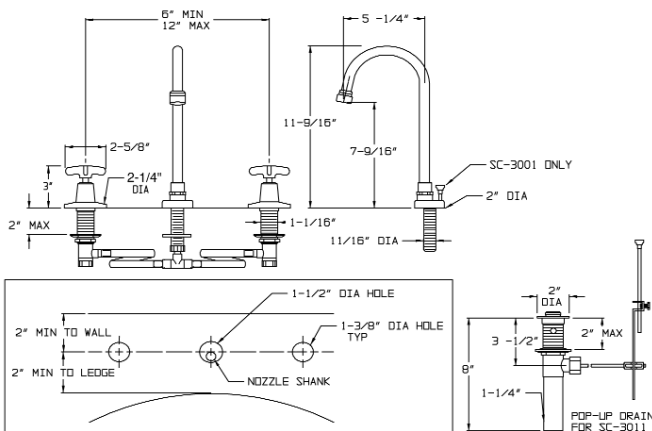

NOTE: Unless otherwise specified, all inlets and outlets are 1/2" NPTF. Unless otherwise specified, all dimensions are in inches and are subject to change without notice.

This space for Architect/Engineer approval.

Commander, Perfect and Autoflo — Registered T.M. Speakman Company
© Copyright, Speakman Company, 2003

Widespread Gooseneck Lavatory Combinations

GENERAL SPECIFICATION

Polished chrome plated Commander widespread gooseneck lavatory combination with Perfect® valves. 1/4 turn ceramic cartridges covered by a 25 year Silver warranty. Brass gooseneck, swivel or rigid. Adjustable centers from 6" to 12". Accommodates installations up to 2" thick. Less strainer drain. Water conserving Autoflo® device reduces flow to 2.2 gpm/8.4 lpm, to meet existing ANSI A112.18.1M Standard.

□ SC-3001-LD

Widespread gooseneck faucet with vandal-resistant four arm handles with color-coded indexes.

□ SC-3002-LD

Widespread gooseneck faucet with vandal-resistant lever handles with color-coded indexes.

□ SC-3004-LD

Widespread gooseneck faucet with vandal-resistant 4" wrist blade handles with color-coded indexes.

OPTIONS

SUFFIX	DESCRIPTION
□ BO	Vandal-Resistant 0.5 gpm Flow Control
□ CWO	Cold Water only
□ D75	Diamond 75 Escutcheons and Handles
□ FC	Laminar Flow Control in base of spout 2.0 gpm
□ HS	Hose and Spray
□ LF	Laminar Flow Outlet 2.2 gpm
□ REV	Reverse Lever Handles (SC-3002-LD only)
□ 4	3-3/4" Deep Spread Gooseneck Spout
□ 8	8" Deep Spread Gooseneck Spout

Speakman Company

P.O. Box 191, Wilmington, DE 19899-0191 USA
1-800-537-2107 Fax: 1-800-977-2747

www.speakmancompany.com

