


COMMANDER®



SC-3004-LD



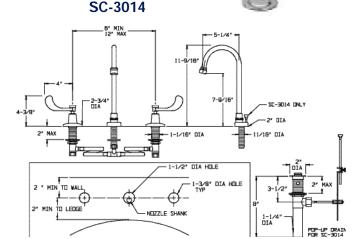

NOTE: Inlets are sized for either coupling or sweat connections. All dimensions are in inches and are subject to change without notice

This space for Architect/Engineer approval.

Widespread Gooseneck Lavatory Combinations

☐ SC-3004-LD

Speakman polished chrome plated COMMANDER widespread gooseneck lavatory combination with PERFECT® valves. ¼ turn ceramic cartridges covered by a 25 year Silver warranty. Vandal-resistant 4" wrist handles with color-coded indexes. Brass gooseneck, swivel or rigid. Adjustable centers from 6" to 12". Accommodates installations up to 2" thick. Water conserving AUTOFLO® device reduces flow to 2.2 gpm/8.4 lpm, to meet existing ANSI A112.18.1M Standard.

□ SC-3014

Speakman polished chrome plated COMMANDER widespread gooseneck lavatory combination with PERFECT valves. ¼ turn ceramic cartridges covered by a 25 year Silver warranty. Vandal-resistant 4" wrist handles with color-coded indexes. 1¼" pop-up drain. Brass gooseneck, swivel or rigid. Adjustable centers from 6" to 12". Accommodates installations up to 2" thick. Water conserving AUTOFLO device reduces flow to 2.2 gpm/8.4 lpm, to meet existing ANSI A112.18.1M Standard.

OPTIONS

SUFFIX	DESCRIPTION
□ BOCA	Vandal-Resistant 0.5 gpm Flow Control
□ D75	Diamond 75 Escutcheons and Handles
□ FC	Laminar Flow Control in base of spout 2.0 gpm
□HS	3 Hoses
□ LD	Less Drain Assembly (SC-3014 only)
□ LF	Laminar Flow Outlet 2.2 gpm
□ 8	8" Deep Spread Gooseneck Spout

Speakman Company

P.O. Box 191, Wilmington, DE 19899-0191 USA 1-800-537-2107 Fax: 1-800-977-2747 www.speakmancompany.com

