


COMMANDER®



SC-3082-LD



SC-3092

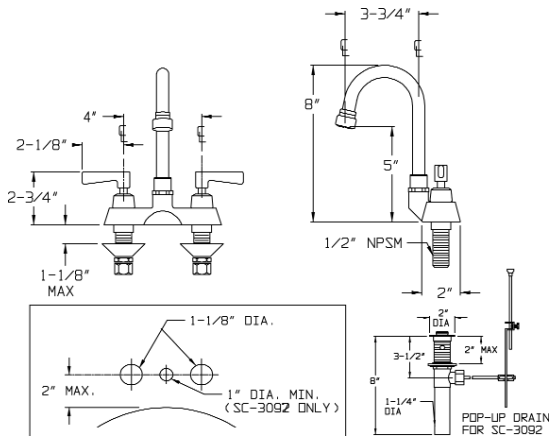

NOTE: Inlets are sized for either coupling or sweat connections. All dimensions are in inches and are subject to change without notice.

Centerset Gooseneck Bar Sink Combinations

□ SC-3082-LD

Polished chrome plated Commander vandal-resistant brass 4" centerset gooseneck combination with Perfect® valves. 1/4 turn ceramic cartridges covered by a 25 year Silver warranty. Lever handles. Rigid shanks. Brass gooseneck, swivel or rigid. Less strainer drain. Water conserving Autoflo® device reduces flow to 2.2 gpm/8.4 lpm, to meet existing ANSI A112.18.1M Standard.

□ SC-3092

Polished chrome plated Commander vandal-resistant brass 4" centerset gooseneck combination with Perfect valves. 1/4 turn ceramic cartridges covered by a 25 year Silver warranty. Lever handles. Rigid shanks. 1-1/4" pop-up drain. Brass gooseneck, swivel or rigid. Water conserving Autoflo control device reduces flow to 2.0 gpm/7.57 lpm, to meet existing ANSI A112.18.1M Standard.

OPTIONS

SUFFIX	DESCRIPTION
□ BO	Vandal-Resistant 0.5 gpm Flow Control
□ FC	Laminar Flow Control in Base of Spout 2.0 gpm
□ LD	Less Drain Assembly (SC-3092 only)
□ LF	Laminar Flow Outlet 2.2 gpm
□ 5	5-3/8" Deep Spread Gooseneck
□ 8	8" Deep Spread Gooseneck

This space for Architect/Engineer approval.

Speakman Company

P.O. Box 191, Wilmington, DE 19899-0191 USA
1-800-537-2107 Fax: 1-800-977-2747

www.speakmancompany.com

