

## VERSATILE™




**VS-1985-AF**

## Shower Combination

### □ VS-1985-AF

Versatile shower system includes Sentinel Mark II® Regency™ concealed anti-scald balanced pressure valve. Chrome plated metal wall plate. Patented metal lever handle accommodates roughing-in variations. Adjustable temperature limit stop. Brass body. Noryl® bonnet. Pressure balancing module. Ceramic temperature regulating module. Can be installed back-to-back. Roughing-in template. Vandal-resistant standard. Four port valve with 1/2" inlets and outlets. Furnished with spring check stops. 2" fully adjustable black spray face. Chrome plated brass supply ell with wall flange. 69" square lock stainless steel hose with rubber liner. Chrome plated brass in-line vacuum breaker. 24" chrome plated brass slide bar with mounting screws. Water conserving pressure compensating Autoflo® device reduces flow to 2.5 gpm/9.46 lpm maximum, to meet existing ANSI A112.18.1M Standard. Meets ASSE 1016, 1989 Standard.

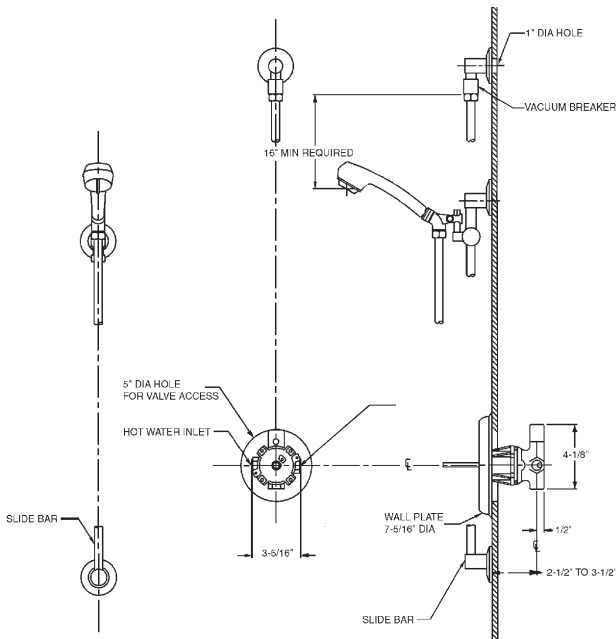

NOTE: Unless otherwise specified, all inlets and outlets are 1/2" NPTF. Locations of shower hangers are optional, but restricted by 69" hose length running from shower arm diverter connection to hand shower. All dimensions are in inches unless otherwise specified and are subject to change without notice.

This space for Architect/Engineer approval.

### OPTIONS

SUFFIX	DESCRIPTION
□ VH	69" White Vinyl Hose

### Speakman Company

P.O. Box 191, Wilmington, DE 19899-0191 USA  
 1-800-537-2107 Fax: 1-800-977-2747  
[www.speakmancompany.com](http://www.speakmancompany.com)

