

Hydapipe® Surface Mounted Shower System

- 1-801S: Standard length
- 1-802S: Short length

Safetymix Pressure-Balancing mixing valve with integral stops and adjustable stop screw to limit handle turn. Super shower head on institutional type head bracket fitting. Attached soap dish and top cap. Stainless steel covering to be 18 gauge with #4 brush finish.


Modifications:

Add:

- Suffix 285: Fre-Flo head with rigid connection.
- Suffix 21: Single control on-off valve.
- Suffix 56: Combination Safetymix and ShowerOff valve.
- Suffix 60: Showeroff valve in lieu of Safetymix valve.

Delete:

- Suffix S: If soap dish is not required.

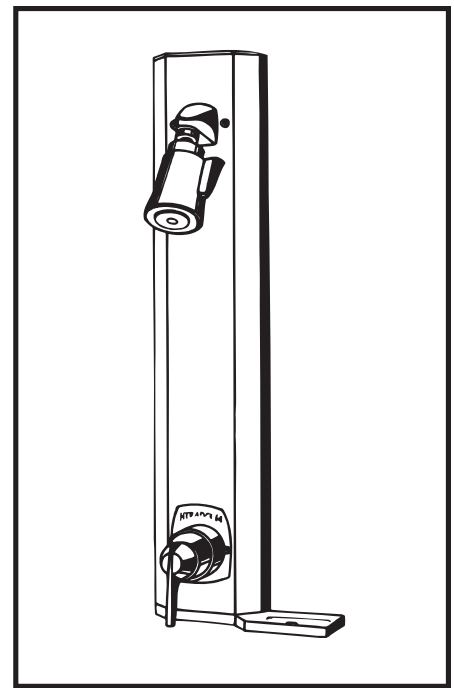

SYMMONS PRODUCTS MEET
 ANSI A112.18.1M, EPA '92
 AND ALL KNOWN FLOW RATE
 REQUIREMENTS.
Showerheads and Hand Showers
2.5 GPM (9.5 L/min)

Job/Location

.....

Engineer

.....

Contractor

.....

This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

SYMMONS INDUSTRIES, INC.
 31 Brooks Drive, Braintree, MA 02184
 TEL: 1-800-SYMMONS, (781) 848-2250 FAX: 1-800-961-9621, (781) 843-3849
 website: www.symmons.com

