

Hydapipe Surface Mounted Shower System

- 1-904S-FSB: Through ceiling piping configuration with soap dish
- 1-904-FSB: Through ceiling piping configuration less soap dish

Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. Fre-Flo, all brass, vandal resistant head with ball joint on institutional type head bracket. Levertrol lever diverter with volume control. Wall/hand shower with flexible 5' metal hose with in-line vacuum breaker, wall connection and flange. 30" slide bar for hand shower mounting. Attached soap dish and matching cover with ceiling flange to conceal supplies to ceiling. Stainless steel covering to be 18 gauge with #4 brush finish.

Modifications:

Valve:

- Suffix 21: Single supply, manual shut off, 4 arm handle
- Suffix 22: Single supply, manual shut off, lever handle
- Suffix 60: Single supply, metering shut off
- Suffix 56: Pressure Balance and metering combination

Shower head:

- Suffix 270: Fre-Flo, all brass, ball joint, adjustable spray with volume control
- Suffix 131: Super, ball joint, adjustable spray head
- Suffix 121: Super, ball joint, adjustable spray head with volume control
- Suffix 285: Fre-Flo, all brass, fixed spray (no ball joint)
- Suffix OWBJ: One way ball joint
- Suffix DSH: Additional shower head in lieu of hand spray unit

Soap dish:

- Suffix RS: Recessed soap dish
- Suffix CWM: Wall mounted cake soap dish

Hand spray accessories:

- Suffix FS: Hand spray, hose and wall hook (in lieu of Suffix FSB)
- Suffix QD: Quick disconnect for hand spray units
- Suffix R: White vinyl hose in lieu of metal hose

Seat and Grab bars*:

- Suffix HC1: Slat seat and two wall grab bar (right hand)
- Suffix HC2: Slat seat and two wall grab bar (left hand)
- Suffix HC3: Padded seat and two wall grab bar (right hand)
- Suffix HC4: Padded seat and two wall grab bar (left hand)

*ADA requirements state that the seat shall be located opposite the controls. This will require the construction of a partial wall, or use of a reinforced partition for mounting the folding seat. Construction of a partial wall or reinforced partition to be provided by others.

Vertical Extension Cover:


- Specify shower head height: _____
- Specify ceiling height: _____

SYMMONS INDUSTRIES, INC.

31 Brooks Drive, Braintree, MA 02184-3804

TEL: 1-800-SYMMONS, (781) 848-2250 FAX: 1-800-961-9621, (781) 843-3849

Website: www.symmons.com

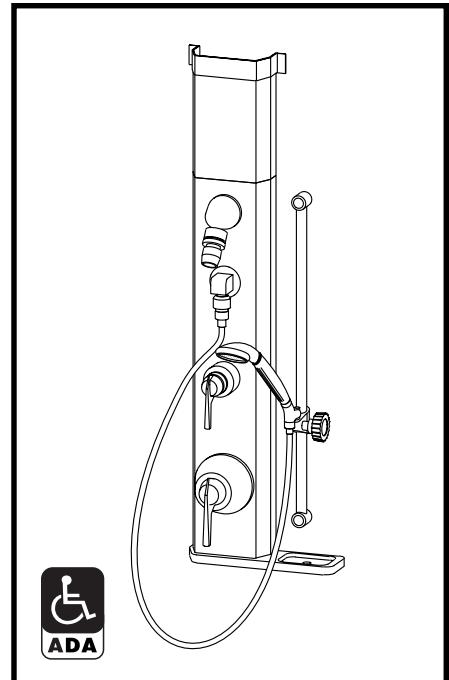

SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.

Shower Heads and Hand Showers
2.5 (9.5 L/min)

Job/Location

.....

Engineer

.....

Contractor

.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

Symmons®