

# THERMIXER®

## Thermostatic Mixing Valve in Cabinet

**Thermixer** thermostatic mixing valve, all bronze removable piston and thermal motor. Standard finish rough bronze, inlets and outlet IPS unless indicated otherwise. Cabinet to be 16 gauge body, 12 gauge hinged left hand door with cylinder lock and valve mounting bracket. Standard cabinet fully recessed steel with baked white enamel finish.

Model No.	Inlets	Outlet
<input type="checkbox"/> 5-120B	1/2" (13mm)	1/2" (13mm)
<input type="checkbox"/> 5-200B	3/4" (19mm)	3/4" (19mm)
<input type="checkbox"/> 5-140B	1" (25mm)	1" (25mm)


### Modifications:

- Suffix SW:** Sweat connections
- Suffix CKX:** Separate check stops (5-120 only)
- Suffix CK:** Separate checks\*
- Suffix NI:** Rough chrome finish
- Suffix T:** Stainless steel cabinet

\* Checks are recommended to prevent by-pass when a Thermixer is installed with a downstream shut-off device.

### Physical Dimensions

Model No.	A	B	C	D	E	F	G
<b>5-102B</b>	10" (254mm)	3 5/16" (100mm)	5" (127mm)	5" (127mm)	10" (254mm)	3 1/2" (89mm)	4" (102mm)
<b>5-120BM</b>	8 1/2" (216mm)	3 5/16" (100mm)	5" (127mm)	5" (127mm)	8 1/2" (216mm)	3 1/2" (89mm)	4" (102mm)
<b>5-130B</b>	10" (254mm)	3 5/16" (100mm)	5" (127mm)	5" (127mm)	10" (254mm)	3 1/2" (89mm)	4" (102mm)
<b>5-130BM</b>	8 1/2" (216mm)	3 5/16" (100mm)	5" (127mm)	5" (127mm)	8 1/2" (216mm)	3 1/2" (89mm)	4" (102mm)
<b>5-140B</b>	10" (254mm)	3 5/16" (100mm)	5" (127mm)	5" (127mm)	10" (254mm)	3 1/2" (89mm)	4" (102mm)
<b>5-140BM</b>	8 1/2" (216mm)	3 5/16" (100mm)	5" (127mm)	5" (127mm)	8 1/2" (216mm)	3 1/2" (89mm)	4" (102mm)

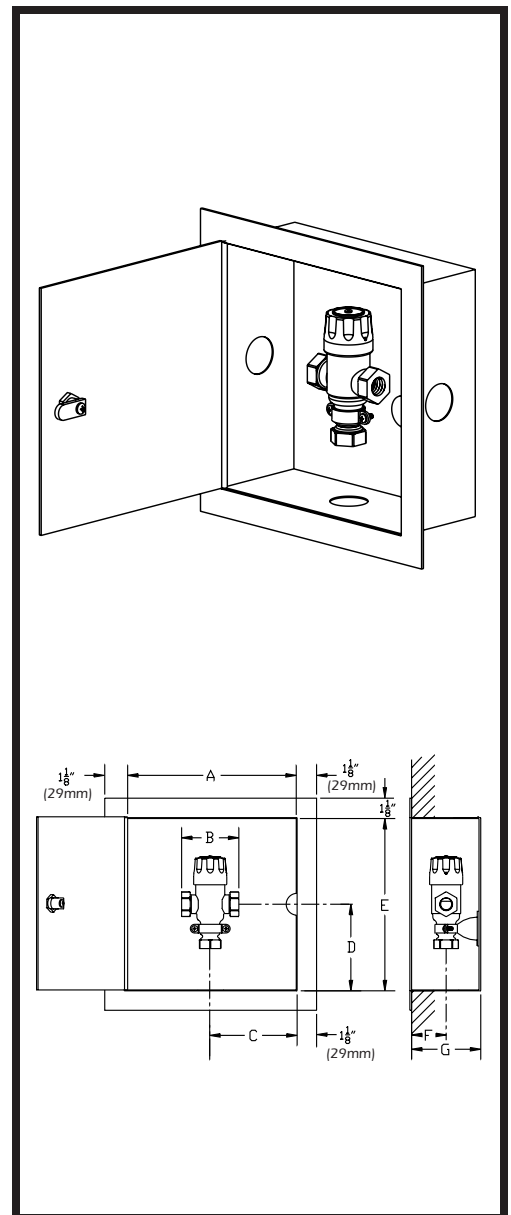

Job/Location

.....  
 .....

Engineer

.....  
 .....

Location

.....  
 .....

SYMMONS INDUSTRIES, INC.

31 Brooks Drive, Braintree, MA 02184-3804

TEL: 1-800-SYMMONS, (781) 848-2250 FAX: 1-800-961-9621, (781) 843-3849

Web site: www.symmons.com

