SYMMETRIX[®] Two Handle Lavatory Faucet

☐ S-240-2-G: With grid strainer drain assembly

☐ S-240-2: With lift rod and pop-up drain assembly

☐ S-240-1: With lift rod only

☐ S-240-0: Faucet only (no lift rod hole)

☐ S-240: Faucet only


Symmetrix Two Handle 4" Centerset Lavatory Faucet with quarter turn ceramic control components and blade handles with red/blue indicators. Aerator, 1/2" IPS shanks, metal construction, polished chrome finish.


Modifications:


Add:

□ **Suffix FR:** 0.5 gpm flow restrictor outlet spray (vandal resistant)

□ **Suffix VP:** Vandal resistant aerator □ **Suffix OFG:** Offset grid strainer

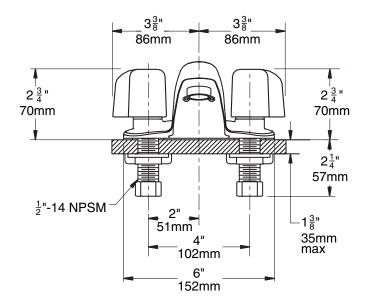



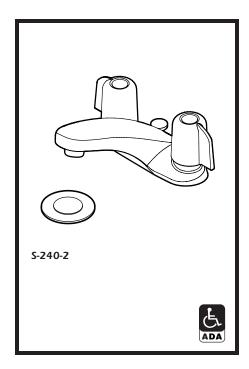

SYMMONS PRODUCTS MEET ANSI A112.18.1M, EPA '92 AND ALL KNOWN FLOW RATE REQUIREMENTS. Kitchen and Lavatory Faucets 2.2 GPM (8.3 L/min)

Job/Location																								
٠.																								
Er	Engineer																							
٠.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
٠.																								
Contractor																								
٠.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.



