

SYMMETRIX®

Two Handle Lavatory Faucet

- S-250-2-FR-G: With grid strainer drain assembly
- S-250-2-FR: With lift rod and pop-up drain assembly
- S-250-1-FR: With lift rod only
- S-250-FR: Faucet only

Symmetrix Two Handle 4" Cast Brass Centerset Lavatory Faucet with quarter turn ceramic control components and blade handles with red/blue indicators. 0.5 gpm (1.9 L/min) vandal resistant spray outlet, 1/2" IPS shanks, solid brass construction, polished chrome finish.




Modifications:

Add:

- Suffix VP: Vandal resistant aerator
- Suffix OFG: Offset grid strainer

Delete:

- Suffix FR: 2.2 gpm (8.3 L/min) vandal resistant aerator in place of 0.5 gpm (1.9 L/min) spray outlet

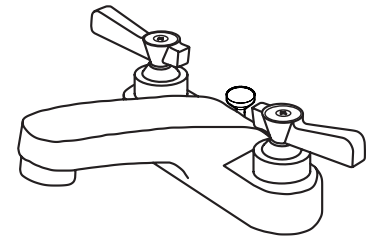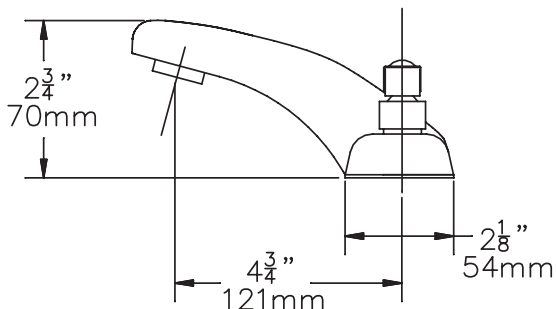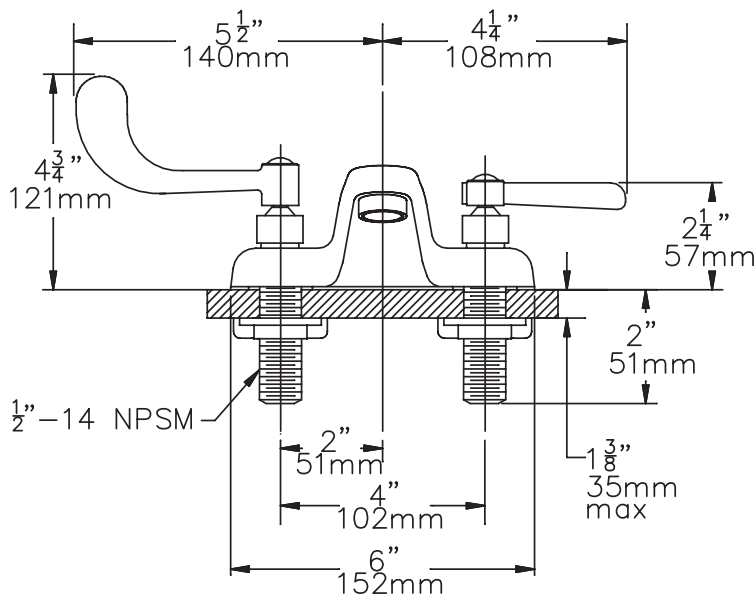

S-250-2-FR



**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Kitchen and Lavatory Faucets
2.2 GPM (8.3 L/min)**

Job/Location

.....
.....

Engineer

.....
.....

Contractor

.....
.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

SYMMONS INDUSTRIES, INC.
31 Brooks Drive, Braintree, MA 02184-3804
TEL: 1-800-SYMMONS, (781) 848-2250 FAX: 1-800-961-9621, (781) 843-3849
Web site: www.symmons.com

