

SYMMETRIX[®]

Two Handle Lavatory Faucet


- S-254-G-LWG: With grid strainer drain assembly
- S-254-LWG: Faucet only

Symmetrix Two Handle Widespread Lavatory Faucet with quarter turn ceramic control components, 11-1/16" gooseneck rigid/swivel spout, and wrist blade handles with red/blue indicators. Aerator, 1/2" IPS shanks, 8" to 16" centers, metal construction, polished chrome finish.


Modifications:

Add:

- Suffix **FR**: 0.5 gpm flow restrictor outlet spray (vandal resistant)
- Suffix **NA**: Non-aerated laminar flow outlet
- Suffix **VP**: Vandal resistant aerator
- Suffix **OFG**: Offset grid strainer

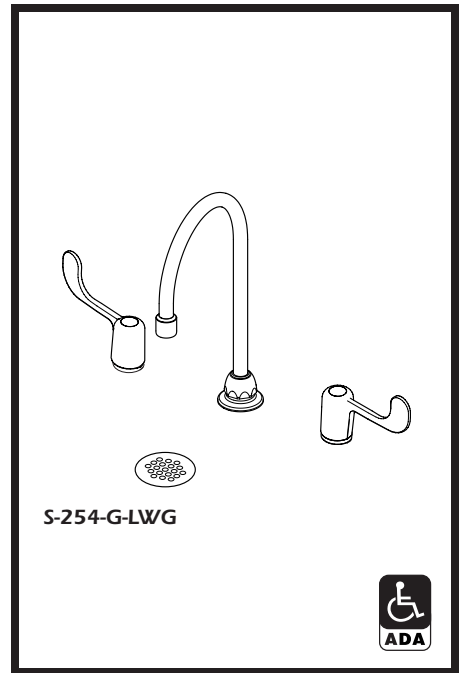

**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Kitchen and Lavatory Faucets
2.2 GPM (8.3 L/min)**

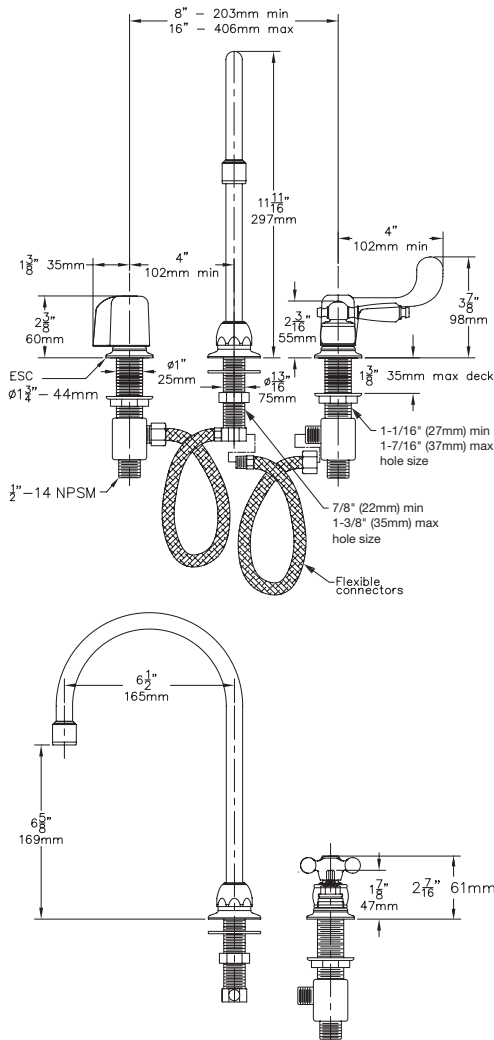

Job/Location

.....

.....

Engineer

.....

.....

Contractor

.....

.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

SYMMONS INDUSTRIES, INC.
31 Brooks Drive, Braintree, MA 02184-3804
TEL: 1-800-SYMMONS, (781) 848-2250 FAX: 1-800-961-9621, (781) 843-3849
Web site: www.symmons.com

