

For Water Heater Applications

Job Name _____ Contractor _____
 Job Location _____ Approval _____
 Engineer _____ Contractor's P.O. No. _____
 Approval _____ Representative _____

No. SL100XL, L100XL, LL100XL and LLL100XL

Extended Shank

Size $\frac{3}{4}$ " (20mm)

ASME rated. Models L100XL and LL100XL are self-closing T&P Relief Valves for Water Heaters up to 100,000 BTU/Hr.

ASME rated. Models SL100XL and LLL100XL are self-closing T&P Relief Valves for Water Heaters up to 105,000 BTU/Hr.

Watts No. SL100XL, L100XL, LL100XL and LLL100XL have extended inlet shanks for use with the new generation of water heaters containing extra thick insulation. These valves eliminate the use of an extension nipple required with standard shank length models.

The combined 2-in-1 Temperature & Pressure relief valve provides the least expensive and proven means for protection against both excessive temperature and pressure emergency conditions.

Watts Self-closing combination T&P relief valves are design certified and listed by CSA and ASME.

They provide fully automatic temperature and pressure relief protection for hot water storage tanks and heaters up to 100,000 BTU/Hr. (L100XL, LL100XL) or 105,000 BTU/Hr. (SL100XL, LL100XL). The temperature sensing element must be immersed in the water within the top 6" (152mm) of the tank. Male inlet and female outlet. Temperature relief 210°F (99°C). Standard setting 75, 100, 125, 150 psi (5.27, 7.03, 8.79, 10.55 bar).


FEATURES

- ✦ No. SL100XL Extended inlet model for installations with thick insulation. Suitable for water heaters with up to $1\frac{3}{4}$ " (44.5mm) of insulation. (105,000 BTU)
- ✦ No. L100XL Extended inlet model for installations with thick insulation. Suitable for water heaters with up to 2" (50.8mm) of insulation. (100,000 BTU)
- ✦ No. LL100XL Extra extended inlet model. Suitable for water heaters with up to $2\frac{1}{2}$ " (63.5mm) of insulation. (100,000 BTU)
- ✦ No. LLL100XL Extra extended inlet model. Suitable for water heaters with up to 3" (76mm) of insulation. (105,000 BTU)
- ✦ Thermostats with special protective coating.
- ✦ All bronze body.
- ✦ Stainless steel spring.
- ✦ Thermostat is accurate and proven. Exclusively designed and manufactured by Watts.

SPECIFICATIONS

Temperature & Pressure Relief Valves

Each hot water storage heater shall be equipped with a CSA and ASME rated automatic temperature and pressure relief valve to protect the heater from excessive pressure and excessive temperature. The device shall be ANSI Z21.22 certified. The BTU discharge capacity of the device shall be in excess of the BTU input rating of the heater. Watts Regulator Company No. SL100XL, L100XL, LL100XL or LLL100XL.

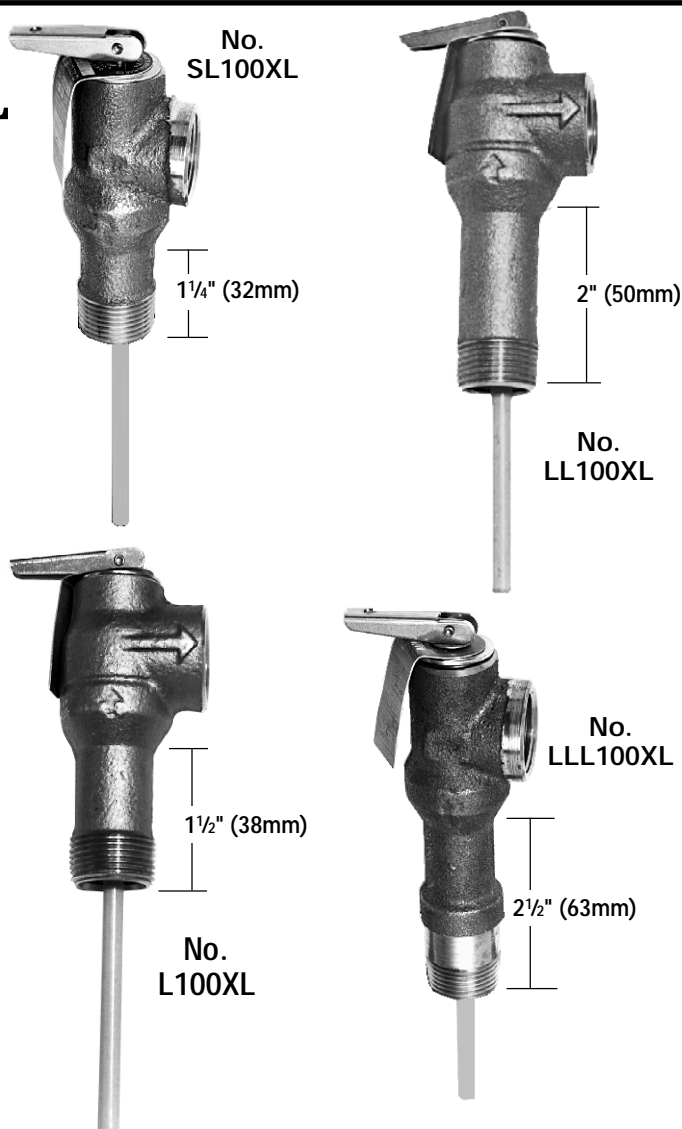

WARNING: Following installation, the valve lever **MUST** be operated **AT LEAST ONCE A YEAR** by the hot water tank owner to insure that the waterways are clear. Certain naturally occurring mineral deposits may adhere to the valve, rendering it inoperative. When manually operating the lever, please take precautions to avoid contact with hot water that may discharge and to avoid water damage. **BEFORE operating lever**, check to see that a discharge line is connected to this valve directing the flow of hot water from the valve to a proper place of disposal, otherwise personal injury may result. If no water flows, valve is inoperative. **TURN OFF THE WATER HEATER AND CALL A PLUMBER IMMEDIATELY.**


This device is designed for emergency safety relief and shall not be used as an operating control.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.


No. SL100XL, L100XL, LL100XL and LLL100XL (continued)

Direct Side Tapping

Vertical discharge line must be installed with its direction downward.

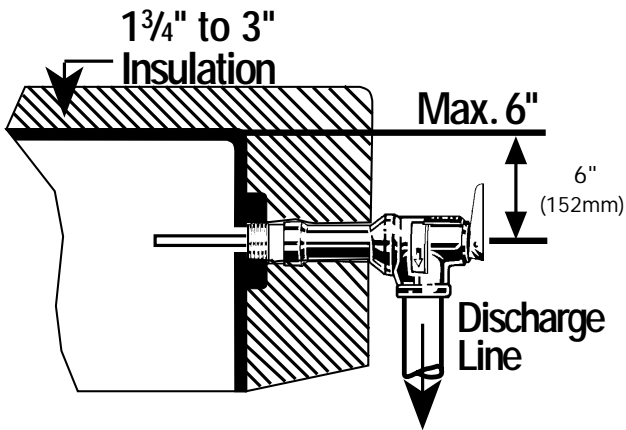

For Heaters with Direct Top Tapping

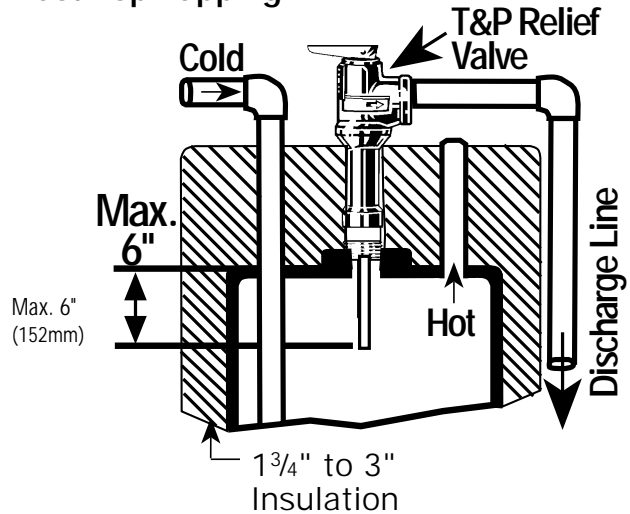

- No. SL100XL suitable for water heaters with up to 1³/₄" (44mm) of insulation.
- No. L100XL suitable for water heaters with up to 2" (50.8mm) of insulation.
- No. LL100XL suitable for water heaters with up to 2¹/₂" (63.5mm) of insulation.
- No. LLL100XL suitable for water heaters with up to 3" (76mm) of insulation.

DIMENSIONS-WEIGHTS

No.	Size		Height Less Thermostat		Width		Weight		C.S.A. Temp Steam Rating BTU/Hr	Model
	inches	mm	inches	mm	inches	mm	lbs.	Kg		
SL100XL	3/4	20	4 1/4	108	1 7/8	48	3/4	.34	105,000	Z5
L100XL	3/4	20	4 1/4	108	1 7/8	48	3/4	.34	100,000	M5
LL100XL	3/4	20	4 3/4	127	1 7/8	48	3/4	.34	100,000	M5
LLL100XL	3/4	20	4 3/4	127	1 7/8	48	3/4	.34	105,000	Z5

WARNING: REINSPECTION OF T&P RELIEF VALVE: Temperature and Pressure Relief Valves should be reinspected AT LEAST ONCE EVERY THREE YEARS by a licensed plumbing contractor or authorized inspection agency, to insure that the product has not been affected by corrosive water conditions and to insure that the valve and discharge line have not been altered or tampered with illegally. Certain naturally occurring conditions may corrode the valve or its components over time, rendering the valve inoperative. Such conditions are not detectable unless the valve and its components are physically removed and inspected. Do not attempt to conduct this inspection on your own. Contact your plumbing contractor for a reinspection to assure continuing safety. **FAILURE TO REINSPECT THIS VALVE AS DIRECTED COULD RESULT IN UNSAFE TEMPERATURE OR PRESSURE BUILD-UP WHICH CAN RESULT IN SERIOUS INJURY OR DEATH AND/OR SEVERE PROPERTY DAMAGE.**

IMPORTANT: A relief valve functions in an emergency by discharging water. Therefore, it is essential that a discharge line be piped from the valve in order to carry the overflow to a safe place of disposal. The discharge line must be the same size as the valve outlet and must pitch downward from the valve and terminate at least 6" (152mm) above the floor drain where any discharge will be clearly visible. For 100DT discharge line consult your Watts agent.



USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.wattsreg.com
Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscca.com

