

HEAT TRACE

RAYCHEM



Self-regulating cables for hot water temperature maintenance

Raychem® HWAT® self-regulating heating cables are installed on hot water supply pipes underneath standard pipe insulation. The heating cable adjusts its power output to compensate for variations in water temperature and ambient temperature. The heating cable replaces supply-pipe heat losses at the point where the heat loss occurs, thereby providing continuous, energy-efficient, hot water temperature maintenance and eliminating the need for a recirculation system.

Simplified design

Single-pipe HWAT systems eliminate the need for designing complex recirculation systems, with their pumps, piping networks, and complicated flow balancing.

Special cases, such as retrofits and multiple pressure zones, are simple to design.

Low installed cost

Installation of the HWAT system is simple. The heating cable can be cut to length, spliced, tee-branched, and terminated at the job site, reducing installation costs. Fewer plumbing components are needed; recirculation piping, pumps, and balancing valves are all eliminated.


Low operating cost

The HWAT system continuously maintains hot water temperature at every point along the supply pipe. Unlike conventional recirculation systems, HWAT systems do not require the overheating of supply water to allow for cooling. The HWAT system reduces the energy requirements of typical hot

water systems with reduced heat loss from supply piping, no heat loss from recirculation piping, and no pump to run.

HWAT-ECO and ACCS-30 Controllers

The HWAT-ECO electronic controller is designed for operation with HWAT-Y2 and HWAT-R2 heating cables only. The HWAT-ECO provides flexible temperature control, energy savings, heat-up cycle function, BMS interface, and nine predefined programs that can be customized by the user. The DigiTrace® ACCS-30 controller also incorporates the features of the HWAT-ECO for large systems and multiple application control. The ACCS-30 only supports HWAT-Y2 and HWAT-R2 heating cables for hot water temperature maintenance applications.

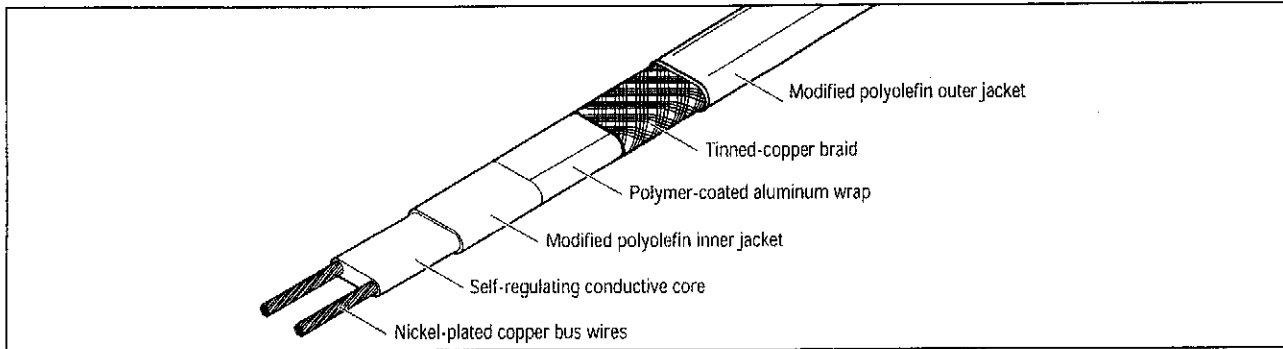

Specifications

Jacket	Modified polyolefin
Braid	Tinned copper
Bus wires	16 AWG nickel-plated copper
Supply voltage	208–277 V (277 V only when used with the ACCS-30 Control System)
Minimum bend radius	0.5 in (12 mm)

Product Characteristics (Nominal)

	HWAT-Y2	HWAT-R2
Catalog number		
Jacket color	Yellow	Red
Maintain temperature range*	105°F (40°C) to 125°F (50°C)	105°F (40°C) to 140°F (60°C)
Weight	200 lbs/1000 ft (0.31 kg/m)	230 lbs/1000 ft (0.35 kg/m)
Dimensions		
Width	0.67 in (17 mm)	0.72 in (18 mm)
Thickness	0.38 in (10 mm)	0.38 in (10 mm)

* When designed in accordance with the HWAT System Product Selection and Design Guide

Design and Installation

For proper design and installation, use the Design section of the *HWAT System Product Selection and Design Guide (H57538)* and the *HWAT System Installation and Operations Manual (H57548)*.

Maximum Circuit Length ft (m)

Breaker size	HWAT-Y2	HWAT-R2
	@208 V	@208 V
30 A	800(240)	500(150)
20 A	500(150)	330(100)
15 A	350(105)	250(75)

Ground-Fault Protection

To minimize the danger of fire from sustained electrical arcing if the heating cable is damaged or improperly installed, and to comply with Tyco Thermal Controls requirements and national electrical codes, 30 mA ground-fault equipment protection must be used on each heating cable branch circuit. Arcing may not be stopped by conventional circuit protection.

Approvals



LISTED
718K



-G



APPROVED

Pipe Heating Cable

HWAT heating cables are UL Listed, CSA Certified, and FM Approved when used with the appropriate agency-approved Raychem connection kits and accessories.

Worldwide Headquarters

Tyco Thermal Controls
7433 Harwin Drive
Houston, TX 77036
USA

Tel: 800-545-6258

Tel: 650-216-1526

Fax: 800-527-5703

Fax: 650-474-7711

info@tycothermal.com

www.tycothermal.com

Canada

Tyco Thermal Controls
250 West St.

Trenton, Ontario

Canada K8V 5S2

Tel: 800-545-6258

Fax: 800-527-5703

Latin America

Tyco Thermal Controls

7433 Harwin Drive

Houston, TX 77036

United States

Tel: 713-868-4800

Tel: 713-735-8645

Fax: 713-868-2333

Europe, Middle East, Africa (EMEA)

Tyco Thermal Controls

Romeinse Straat 14

3001 Leuven

België / Belgique

Tel: +32 16 213 511

Fax: +32 16 213 603

Asia Pacific

Tyco Thermal Controls

20F, Innovation Building,

1009 Yi Shan Rd,

Shanghai 200233,

P.R.China

Tel: +86 21 2412 1688

Fax: +86 21 5426 2937 / 5426 3167

Tyco and other trademarks are the property of Tyco Thermal Controls or its affiliates

tyco
Thermal Controls

Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls' only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.