

PVC PIPE & FITTINGS

**CHARLOTTE PIPE & FOUNDRY
COMPANY**

CHARLOTTE

PIPE AND FOUNDRY COMPANY

This is to certify that all Plastic Pipe and Fittings manufactured by Charlotte Pipe and Foundry Company are manufactured in the United States and conform to the following standards:

SCH. 40 PVC PIPE

ASTM D 1784, ASTM D 1785, ASTM D 2665
FHA UM 79a
FEDERAL SPECIFICATION L-P-320a
NSF STANDARD NO. 14 AND 61

SCH. 40 PVC DWV PIPE CELLULAR CORE

ASTM D 4396, ASTM F 891
NSF STANDARD NO. 14

SCH. 40 RePVC® DWV PIPE

ASTM D 4396, ASTM F 1760
NSF STANDARD NO. 14

SCH. 40 PVC DWV FITTINGS

ASTM D 1784, ASTM D 2665, ASTM D 3311,
ASTM F 1866
FHA UM 79a
FEDERAL SPECIFICATION L-P-320a
NSF STANDARD NO. 14

PVC PRESSURE PIPE SDR-21 AND SDR-26

ASTM D 1784, ASTM D 2241
NSF STANDARD NO. 14 AND 61

PVC SCH. 40 PRESSURE FITTINGS

ASTM D 1784, ASTM D 2466
NSF STANDARD NO. 14 AND 61

PVC WELL CASING PIPE

ASTM D 1784, ASTM F 480
NSF STANDARD NO. 14 AND 61

PVC SCH. 80 PIPE

ASTM D 1784, ASTM D 1785, PVC 1120
NSF STANDARD NO. 14 AND 61

PVC SCH. 80 FITTINGS

ASTM D 1784, ASTM D 2467, ASTM D 2464,
ASTM F 1970
NSF STANDARD NO. 14 AND 61

PVC SEWER MAIN PIPE

ASTM D 1784, ASTM D 3034 SDR 35
ASTM D 3212, ASTM F 477

PVC SEWER AND DRAIN PIPE

ASTM D 1784, ASTM D 2729

PVC THIN WALL PIPE AND FITTINGS

ASTM D 1784, ASTM D 2949
NSF STANDARD NO. 14

CPVC CTS FLOWGUARD GOLD® PIPE & FITTINGS

ASTM D 1784, ASTM D 2846
FHA UM-61a
NSF STANDARD NO. 14. AND 61
CSA LISTED ON SPECIFIED ITEMS

CPVC CTS REUZE® PIPE

ASTM D 1784, ASTM D 2846
NSF STANDARD NO. 14.

CHEMDRAIN® CPVC SCHEDULE 40 PIPE AND FITTINGS

ASTM D 1784, ASTM F 2618
NSF STANDARD NO. 14

SCH. 40 ABS DWV PIPE CELLULAR CORE

ASTM D 3965, ASTM F 628
NSF STANDARD NO. 14


SCH. 40 ABS DWV FITTINGS

ASTM D 3965, ASTM D 2661, ASTM D 3311
FHA UM 79a
FEDERAL SPECIFICATION L-P-322b
NSF STANDARD NO. 14


Very truly yours,



Hooper Hardison, Executive Vice President



Notary Public
My commission expires July 02, 2012

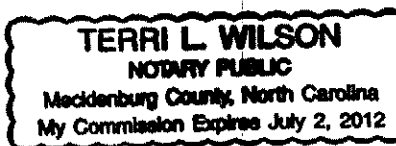

CHARLOTTE

PIPE AND FOUNDRY COMPANY

Plastic Pipe and Fittings Drainage Systems Suggested Short Form Specifications

ABS Schedule 40 Cellular Core (Foam Core) Pipe and DWV Fitting System:

Pipe and fittings shall be manufactured from ABS compound with a cell class of 42222 for pipe and 32222 for fittings as per ASTM D 3965 and conform with National Sanitation Foundation (NSF) standard 14. Pipe shall be iron pipe size (IPS) conforming to ASTM F 628. Fittings shall conform to ASTM D 2661.

All pipe and fittings to be produced by a single manufacturer and to be installed in accordance with manufacturer's recommendations and local code requirements. **WARNING!** Never test with or transport/store compressed air or gas in ABS pipe or fittings. Solvent cement shall conform to ASTM D 2235. The system to be manufactured by Charlotte Pipe and Foundry Co. and is intended for non-pressure drainage applications where the temperature will not exceed 160°F.

PVC Schedule 40 Cellular Core (Foam Core) Pipe and DWV Fitting System:

Pipe and fittings shall be manufactured from PVC compound with a cell class of 11432 per ASTM D 4396 for pipe and 12454 per ASTM D 1784 for fittings and conform with National Sanitation Foundation (NSF) standard 14. Pipe shall be iron pipe size (IPS) conforming to ASTM F 891. Fittings shall conform to ASTM D 2665.

All pipe and fittings to be produced by a single manufacturer and to be installed in accordance with manufacturer's recommendations and local code requirements. **WARNING!** Never test with or transport/store compressed air or gas in PVC pipe or fittings. Solvent cements shall conform to ASTM D 2564. Primer shall conform to ASTM F 656. The system to be manufactured by Charlotte Pipe and Foundry Co. and is intended for non-pressure drainage applications where the temperature will not exceed 140°F.

PVC Schedule 40 Solid Wall Pipe and DWV Fitting System:

Pipe and fittings shall be manufactured from PVC compound with a cell class of 12454 per ASTM D 1784 and conform with National Sanitation Foundation (NSF) standard 14. Pipe shall be iron pipe size (IPS) conforming to ASTM D 1785 and ASTM D 2665. Fittings shall conform to ASTM D 2665.

All pipe and fittings to be produced by a single manufacturer and to be installed in accordance with manufacturer's recommendations and local code requirements. **WARNING!** Never test with or transport/store compressed air or gas in PVC pipe or fittings. Solvent cements shall conform to ASTM D 2564. Primer shall conform to ASTM F 656. The system to be manufactured by Charlotte Pipe and Foundry Co. and is intended for non-pressure drainage applications where the temperature will not exceed 140°F.

(110)