

Guy Gray Manufacturing Co., Inc.

Blandville Road


P. O. Box 2287

Paducah, KY 42002-2287

Phone (502) 554-4423

NOTE:

FOR MODELS USING OVERHEAD
INLET PIPING SET PIPES
AT 48 $\frac{1}{4}$ " ABOVE FLOOR.

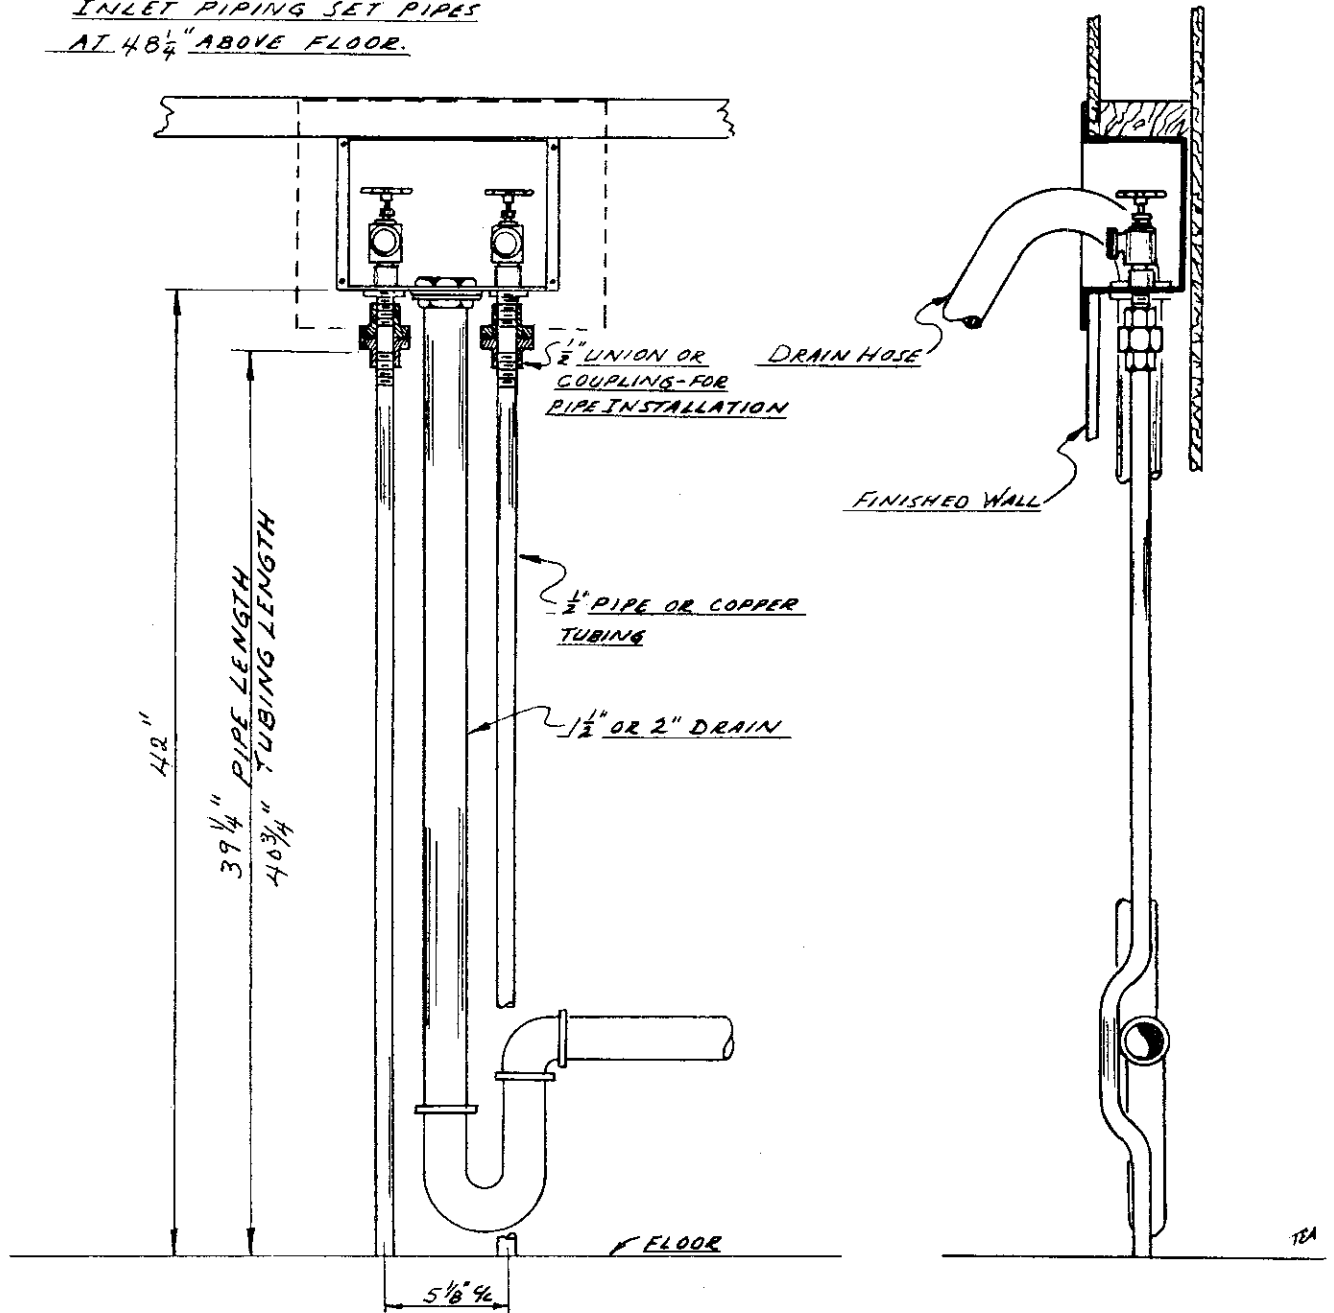

PLUMBING ROUGHING-IN MEASUREMENTS FOR SPACE SAVER WASHING MACHINE SUPPLY AND DRAIN - MODEL B-150 & B-200

Model B-150 & B-200

INSTALLATION INSTRUCTIONS

- 1 Remove front plate from fixture.
- 2 Fasten fixture to stud or header with screws in holes provided
- 3 Install half inch male end of connectors through half inch holes in bottom of fixture and secure with rubber washers - crow foot and half inch lock nuts.
- 4 Install half inch male faucets in female end of connector inside of fixture using pipe joint compound.
- 5 For copper installation sweat copper tube to bottom of connector.
- 6 For galvanized pipe installation use half inch coupling or unions
- 7 To connect drain line use flanged locknut with rubber washer with slipnut installed inside fixture
- 8 After wall is finished, replace front plate with screws provided with fixture.